

## MULTI-WEDGE 65 'H'

**MERV 11**



### **WHY MULTI-WEDGE 65 'H'**

- ◆ WELDED HEAT SEALED POCKETS
- ◆ MOISTURE RESISTANT
- ◆ 100% SYNTHETIC MEDIA
- ◆ SPOR-AX® ANTIMICROBIAL
- ◆ MERV 11
- ◆ 12" & 24" DEPTH

### **MEDIA DESIGNED TO LAST**

*Fiber Bond Multi-Wedge 65 media is a tough, high density polyester manufactured at Fiber Bond.*

*Resistant to high humidity, oil mists, acids, alkalies and most organic solvents.*

*The high dust holding capacity makes the MW 65 'H' a stand alone filter.*

### **HEAT SEAL CONSTRUCTION**

*All perimeter edges and internal dividers are permanently welded together. This dielectric process assures a leak proof self-supporting pocket. No needle holes for dirt migration downstream.*

*The self-supporting pockets withstand the most severe environmental operating conditions.*

### **SPOR-AX - NO EARLY CHANGE OUTS**

*Spor-Ax antimicrobial is a proven, highly effective biocide which controls growth of mold, mildew, algae and fungi on the filter.*

*Mold build up on filter media will increase resistance.*

*No early or unanticipated filter purchases and change outs.*

### **APPLICATIONS**


- |                |                     |
|----------------|---------------------|
| ★ HOSPITALS    | ★ OFFICE BUILDINGS  |
| ★ AIRPORTS     | ★ FOOD PROCESSING   |
| ★ UNIVERSITIES | ★ PRINTING PLANTS   |
| ★ FACTORIES    | ★ MEDICAL BUILDINGS |

**"THE BEST FILTERS  
COME FROM THE BEST MEDIA"**


# TECHNICAL DATA

- MERV 11 - ASHRAE 52.2-1999
- Operating temperature up to 200° F.
- Initial resistance (w.g.) at 492 fpm: 12 inch depth series - 0.42" to 0.45"
- Initial resistance (w.g.) at 492 fpm: 24 inch depth series - 0.37" to 0.40"
- Recommended discard point 1.25" wg
- Underwriter's Laboratories Class 2


**RESISTANCE VS AIRFLOW**

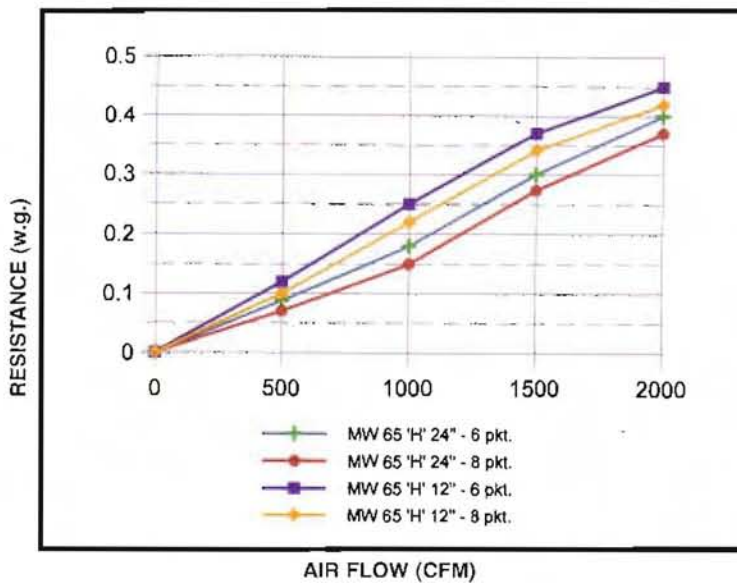

**REMOVAL EFFICIENCY VS PARTICLE SIZE**

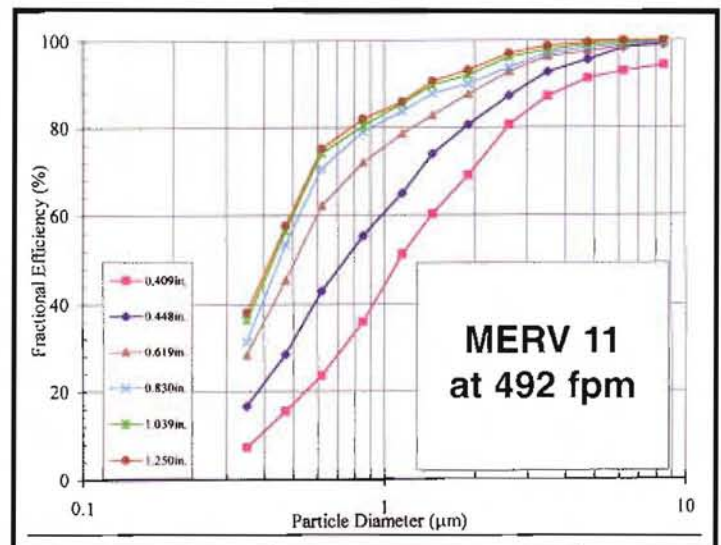

Particle Size Removal Efficiency Conducted by LMS Technologies.  
Filter Size: 24 x 24 x 24 - 6 pocket

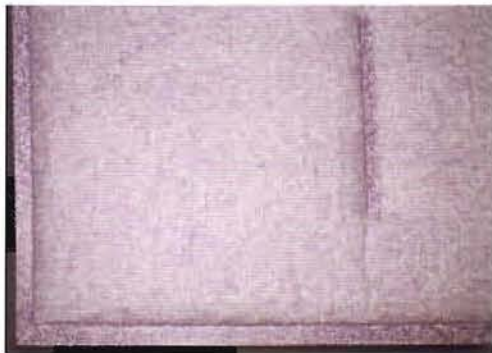

100% Welded Heat Sealed Perimeter Edges and Internal Seals Assure a Leak-Proof Construction.



Fiber Bond Multi-Wedge 65 is Also Available in a Self-Sealing Design.

Spor-Ax® is a registered trademark of Fiber Bond Corporation.

Fiber Bond Corporation 110 Menke Road Michigan City, IN 46360  
Tel: (219) 879-4541 Fax: (219) 874-7502 www.fiberbond.net email: info@fiberbond.net  
Form # FB04 2.5M 5/07